

Quick Installation Guide

Wireless 4G LTE Router

Images may differ from actual products.


©2025 MERCUSYS 7100002244 REV1.0.1

1. Connect the Hardware

- a.** Insert the Nano SIM card into the slot until you hear a click.



- b.** Connect the power adapter to the router.

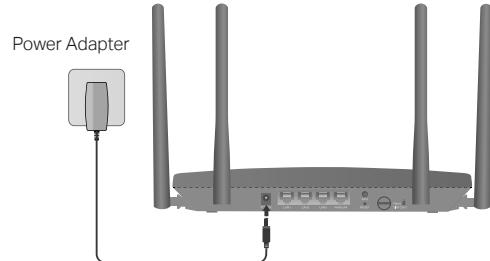

2. Check the LED

Wait until the internet LED (∞ or Y_1) turns on. This confirms your router is successfully connected to the internet.

Notes:

- Make sure your SIM card is unlocked. If not, log in to the router's web management page and go to Advanced > Network > PIN Management to verify.
- If the LED does not turn on (no internet), refer to FAQ-Q2.
- For a better internet connection, make sure the 2-bar or 3-bar signal LED is lit. Otherwise, try relocating the router to a spot that may receive a stronger mobile network signal, such as near a window.

Configure the Router via MERCUSYS App

1. Download the MERCUSYS app via the app store or scan the QR code.



or



2. Open the app and log in with your MERCUSYS ID.

Note: If you don't have an account, create one first.


3. Tap LET'S BEGIN and select your device model. Follow the step-by-step instructions to complete the setup and connect to the internet.

LED Indicators

LED	Status	Indication
	Blinking Green	The router is starting up, upgrading firmware, or establishing a WPS connection.
	Solid Green	The router is working properly.
	Solid Orange	Wi-Fi is off.
	Off	Power is off.
	On	The router is connected to the internet.
	Off	The router is not connected to the internet.
	On	Device is connected via the Ethernet cable.
	Blinking	Device is connecting via the Ethernet cable.
	Off	No device is connected via the Ethernet cable.
	On	Indicates the signal strength received from the mobile internet network. More lit LEDs signify a better signal strength.
	Off	There is no mobile internet signal.

*The LEDs may vary by product.

- b.** Connect the power adapter to the router.

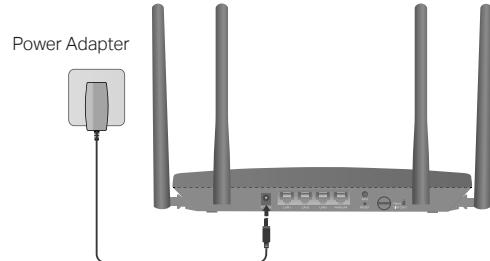

3. Enjoy the Internet

• Wired

Connect your computer to the router's LAN port via an Ethernet cable.

• Wireless

- a. Find the default SSID (network name) and wireless password printed on the label at the bottom of the router.



Note: Images may differ from actual products.

- b. Click the network icon of your computer or go to the Wi-Fi settings of your smart device, and then select the SSID to join the network.

Customize the 4G LTE Router

If you want to customize your router settings, follow the steps below.

- Make sure your computer is connected to the router (wired or wireless).
- Launch a web browser and type in <http://mwlogin.net>. Create a password for future logins.

Note: If the login page does not appear, please refer to FAQ-Q1.

- Follow the step-by-step instructions of the Quick Setup to complete the initial configuration.

Note: This router can function as a wireless router in Wireless Router Mode, compatible with cable, fiber, and DSL modems. For more information, please refer to the user guide at <https://www.mercusys.com/support/>.

FAQ (Frequently Asked Questions)

Q1. What should I do if I cannot access the web management page?

- Reboot your router and try again.
- If the computer is set to a static IP address, change its settings to obtain an IP address automatically.
- Make sure <http://mwlogin.net> is correctly entered in the web browser.
- Use another web browser and try again.
- Disable and enable the active network adapter in use.

Q2. What should I do if I cannot access the internet?

- Verify that your SIM card is an LTE or WCDMA card.
- Verify that your SIM card is in your internet service provider's service area.
- Verify that your SIM card has sufficient credit.
- Log in to the router's web management page, and check the following:

1) Go to **Advanced > Network > PIN Management** to verify if a PIN is required. If it is, enter the correct PIN provided by your ISP.

2) Go to **Advanced > Network > Internet** to verify the parameters provided by your ISP are correctly entered. If they are incorrect, click **Create Profile** and enter the correct parameters, then select the new profile from the **Profile Name** list.

3) Go to **Advanced > Network > Data Settings** to verify if the used data exceeds the allowance. If it does, click **Correct** and set the used data to 0 (zero), or disable **Data Limit**.

4) Go to **Advanced > Network > Internet** to verify that **Mobile Data** is enabled. If it is not, enable it to access the internet.

5) Confirm with your ISP if you are in a roaming service area. If you are, go to **Advanced > Network > Internet** to enable **Data Roaming**.

Q3. How do I restore the router to its factory default settings?

- With the router powered on, press and hold the **RESET** button on the side panel until the **↓** LED starts blinking, then release the button. Wait until the router reboots.
- Log in to the router's web management page, go to **Advanced > System Tools > Backup & Restore**, and click **Factory Restore**. Wait until the reset process is complete.

Q4. What should I do if I forgot my wireless network password?

- The default wireless password is printed on the product label of the router.
- Connect a computer directly to the router via an Ethernet cable. Log in to the router's web management page and go to **Wireless** to retrieve or reset your wireless password.

Safety Information

- Keep the device away from water, fire, humidity or hot environments.
- Do not attempt to disassemble, repair, or modify the device. If you need service, please contact us.
- Do not use damaged charger or USB cable to charge the device.
- Do not use any other chargers than those recommended.
- Do not use the device where wireless devices are not allowed.
- Adapter shall be installed near the equipment and shall be easily accessible.
- Use only power supplies listed in the user instructions.

MERCUSYS hereby declares that the Wireless 4G LTE Router is in compliance with the essential requirements and other relevant provisions of directives 2014/53/EU, 2009/125/EC, 2011/65/EU and (EU)2015/863.

The original EU Declaration of Conformity may be found at <https://www.mercusys.com/en/ce>

MERCUSYS hereby declares that the Wireless 4G LTE Router is in compliance with the essential requirements and other relevant provisions of the Radio Equipment Regulations 2017.

The original UK Declaration of Conformity may be found at <https://www.mercusys.com/support/ukca/>



For technical support, replacement services, user guides, and other information, please visit
<https://www.mercusys.com/support/>.