

8-Port Gigabit Desktop Switch with 7-Port PoE+

Model: MS108GP


// Highlights

- 8× 10/100/1000 Mbps RJ45 ports
- With 7 PoE+ ports, transfers data and power on one single cable
- Support PoE Power up to 30 W for each PoE port and 65 W for all PoE ports*
- Increases PoE transmission distance to 250 m by Extend Mode*
- One click to divide traffic for specific ports for stability and security
- Works with IEEE 802.3af/at compliant PDs
- Allows for efficient heat dissipation and long network life
- Simple to use and saves time and effort



// Connections

Network deployment made simple with Power over Ethernet.

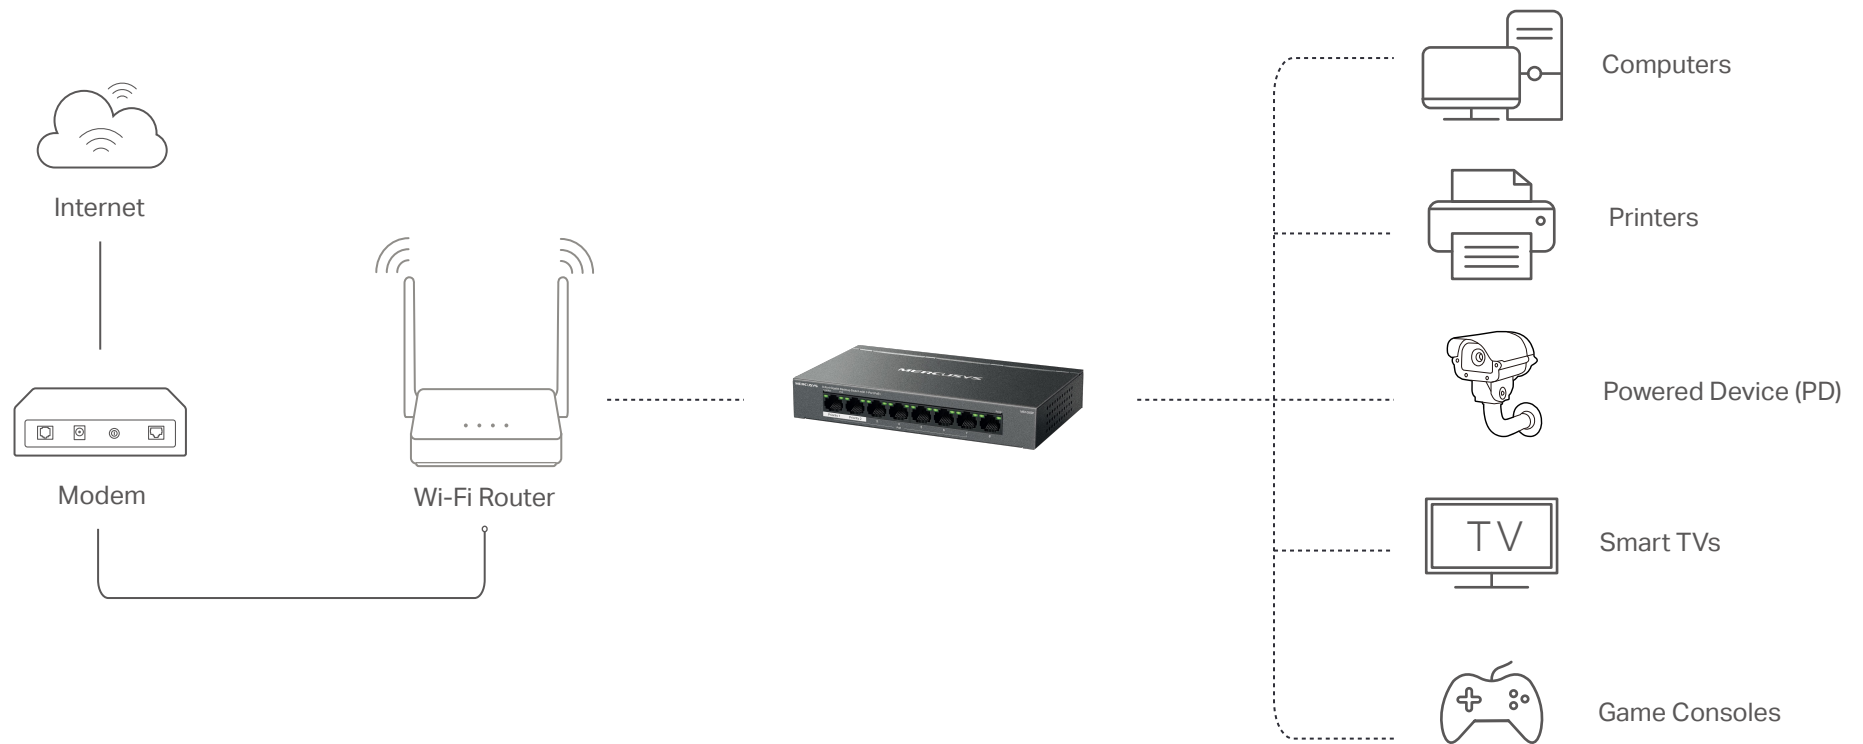

// Specifications

Product Picture	
Model	MS108GP
Standards	IEEE 802.3i, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3x, IEEE 802.1p
Interface	8× 10/100/1000 Mbps RJ45 ports
Ethernet Cable (Twisted Pair)	10BASE-T: 2-pair UTP/STP of Cat. 3,4,5 (≤100 m) 100BASE-TX: 4-pair UTP/STP of Cat. 5e or above (≤100 m) 1000BASE-T: 4-pair UTP/STP of Cat. 5e or above (≤100 m)
PoE	PoE Standard: compatible with 802.3af/at PDs PoE Port 1–7, up to 30 W per port PoE Power Budget 65 W*
Auto-Negotiation	YES
Auto MDI/MDIX	YES
PoE Power on RJ45	Power+: pin 3 & pin 6 Power -: pin 1 & pin 2
Max Power Consumption	5.07W (220V/50 Hz, no PD connected) 77.33W (220V/50 Hz, with 65W PD connected)
Max Heat Dissipation	17.238 BTU/h (no PD connected) 262.922 BTU/h (with 65 W PD connected)
Forwarding Mode	Store and Forward
Switch Capacity	16 Gbps
MAC Address Table	8K, Auto-learning, Auto-aging
Auto Recovery	YES
Extend Mode	YES
Isolation Mode	YES
Flow Control	YES
Fanless	YES
LED	Power, Link/Act, PoE Status
Dimensions	171*98*27mm (6.7*3.9*1.1 in)
Certification	CE, RoHS
Environment	Operating Temperature: -10°C to 40°C (14SS°F to 104°F) Storage Temperature: -40°C to 70°C (-40°F to 158°F) Operating Humidity: 10% to 90% RH, non-condensing Storage Humidity: 5% to 95% RH, non-condensing

// Package Contents

- 8-Port Gigabit Desktop Switch with 7-Port PoE+ (MS108GP)
- Power Adapter
- Rubber Feet
- Quick Installation Guide

*PoE budget calculations are based on laboratory testing. Actual PoE power budget is not guaranteed and will vary as a result of client limitations and environmental factors.
For more information, please visit www.mercusys.com