

Installation Guide

5/8-Port 2.5G Multi-Gigabit Desktop Switch

Panel Explanation

Power

 On: Power on
 Off: Power off

Kensington Security Slot

 Secure the lock (not provided) into the slot to prevent the device from being stolen.

Port LED



When one of the LED is on/flashing

On: Connecting to a device but no activity

Flashing quickly: Transmitting or receiving data

Flashing slowly: Loop detected on the corresponding port

Left LED (2.5G)

Green: Running at 2.5 Gbps

Flashing: Transmitting or receiving data

Right LED (1G/100M)

Green: Running at 1 Gbps

Yellow: Running at 100 Mbps

Flashing: Transmitting or receiving data

DIP Switch


Off  On
 Loop Prevention

On: The switch will monitor and address loop-related issues within the network structure to prevent disruptions caused by redundant pathing

Off: (default) The switch will not try to monitor or address loop-related issues

Note:

For simplicity, we will take MS105GS-M2 for example in this guide.

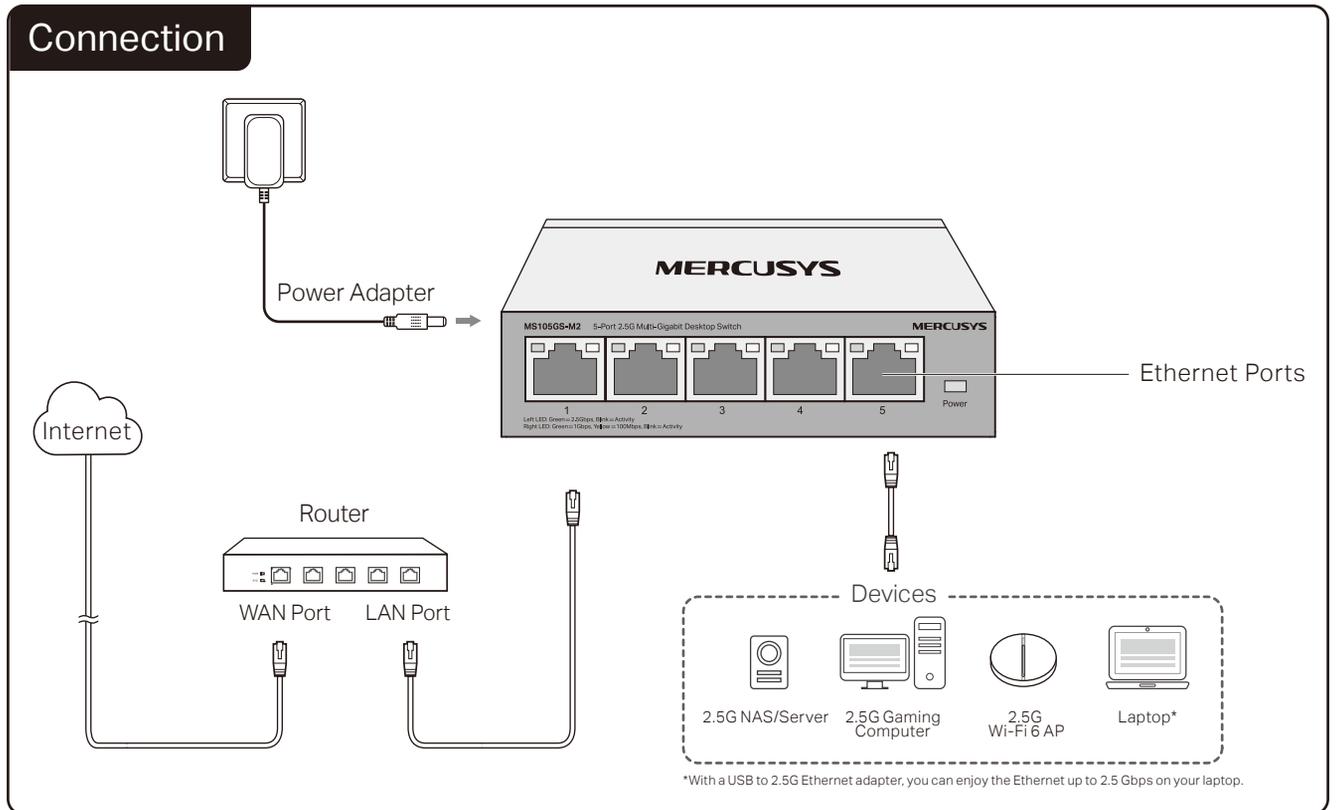

Specifications

General Specifications

Standard	IEEE802.3, IEEE802.3u, IEEE802.3ab, IEEE802.3bz, IEEE802.3x, IEEE802.1p
Protocol	CSMA/CD
Ethernet Cable (Twisted Pair)	100Base-TX: UTP category 5 cable or above (max. 100 m)
	1000Base-T: UTP category 5e cable or above (max. 100 m)
	2.5GBase-T: UTP category 5e cable or above (max. 100 m)
Interface	5/8 100 Mbps/1 Gbps/2.5 Gbps Auto-Negotiation RJ45 Ports
Switching Capacity	MS105GS-M2: 25 Gbps
	MS108GS-M2: 40 Gbps
Transfer Method	Store-and-Forward
MAC Address Learning	Automatically learning, automatically aging
Frame Forward Rate	100Base-TX: 148810pps/Port
	1000Base-T: 1488095pps/Port
	2.5GBase-T: 3720238pps/Port
Wall mountable	Yes
Distance between mounting holes	MS105GS-M2: 52 mm
	MS108GS-M2: 110 mm

Environmental and Physical Specifications

Operating Temperature	0 °C to 40 °C (32 °F to 104 °F)
Storage Temperature	-40 °C to 70 °C (-40 °F to 158 °F)
Operating Humidity	10% to 90% RH non-condensing
Storage Humidity	5% to 90% RH non-condensing

EU declaration of conformity

Mercusys hereby declares that the switch is in compliance with the essential requirements and other relevant provisions of directives 2014/30/EU, 2014/35/EU, 2009/125/EC, 2011/65/EU and (EU)2015/863.

The original EU declaration of conformity may be found at <https://www.mercusys.com/en/ce/>.

UK declaration of conformity

Mercusys hereby declares that the switch is in compliance with the essential requirements and other relevant provisions of the Electromagnetic Compatibility Regulations 2016 and Electrical Equipment (Safety) Regulations 2016.

The original UK declaration of conformity may be found at <https://www.mercusys.com/support/ukca/>



Frequently Asked Questions (FAQ)

Q1. The Power LED is not lit.

The Power LED should be lit when the power system is working normally. If the Power LED is not lit, check as follows:

- A1: Make sure the power adapter is connected to the switch with power source properly.
- A2: Make sure the voltage of the power supply meets the requirements of the input voltage of the switch.
- A3: Make sure the power source is ON.

Q2. The right and left LED are not lit when a device is connected to the corresponding port.

It is recommended that you check the following items:

- A1: Make sure that the cable connectors are firmly plugged into the switch and the device.
- A2: Make sure the connected device is turned on and works normally.
- A3: The cable must be less than 100 meters long (328 feet).

Q3. Why does the switch fail to detect and block a loop from occurring in the network topology when Loop Prevention is enabled?

A: When connecting this switch to other non-terminal devices, such as switches from other brands, and those devices cannot properly process or forward loop detection packets, the Loop Prevention function may be limited. It is recommended to connect terminal devices directly to this switch or use non-terminal devices with full forwarding capability.

 For technical support, replacement services, user guides, and other information, please visit <https://www.mercusys.com/support/>.

Safety Information

- Keep the device away from water, fire, humidity or hot environments.
- Do not attempt to disassemble, repair, or modify the device. If you need service, please contact us.
- Do not use damaged charger or USB cable to charge the device.
- Do not use any other chargers than those recommended.
- Adapter shall be installed near the equipment and shall be easily accessible.
- 運作溫度 : 0°C~40°C (32°F~104°F)

Please read and follow the above safety information when operating the device. We cannot guarantee that no accidents or damage will occur due to improper use of the device. Please use this product with care and operate at your own risk.



Продукт сертифіковано згідно з правилами системи УкрСЕПРО на відповідність вимогам нормативних документів та вимогам, що передбачені чинними законодавчими актами України.



Points de collecte sur www.quefairedesdechets.fr
Privilégiez la réparation ou le don de votre appareil !

BSMI Notice

安全諮詢及注意事項

- 請使用原裝電源供應器或只能按照本產品注明的電源類型使用本產品。
- 清潔本產品之前請先拔掉電源線。請勿使用液體、噴霧清潔劑或濕布進行清潔。
- 注意防潮，請勿將水或其他液體潑灑到本產品上。
- 插槽與開口供通風使用，以確保本產品的操作可靠並防止過熱，請勿堵塞或覆蓋開口。
- 請勿將本產品置放於靠近熱源的地方。除非有正常的通風，否則不可放在密閉位置中。
- 請不要私自拆開機殼或自行維修，如產品有故障請與原廠或代理商聯繫。

警告：為避免電磁干擾，本產品不應安裝或使用於住宅環境。

限用物質含有情況標示聲明書

單元 Unit	限用物質及其化學符號					
	鉛 Lead (Pb)	汞 Mercury (Hg)	鎘 Cadmium (Cd)	六價鉻 Hexavalent chromium (Cr ⁶⁺)	多溴聯苯 Polybrominated biphenyls (PBB)	多溴二苯醚 Polybrominated diphenyl ethers (PBDE)
PCB	○	○	○	○	○	○
外殼	○	○	○	○	○	○
電源供應器	-	○	○	○	○	○
其他及其配件	-	○	○	○	○	○

備考 1. “超出 0.1 wt %” 及 “超出 0.01 wt %” 係指限用物質之百分比含量超出百分比含量基準值
Note 1: “Exceeding 0.1 wt %” and “exceeding 0.01 wt %” indicate that the percentage content of the restricted substance exceeds the reference percentage value of presence condition.

備考 2. “○” 係指該項限用物質之百分比含量未超出百分比含量基準值。
Note 2: “○” indicates that the percentage content of the restricted substance does not exceed the percentage of reference value of presence.

備考 3. “-” 係指該項限用物質為排除項目。
Note 3: The “-” indicates that the restricted substance corresponds to the exemption.

Wall Mounting Specifications

嵌牆安裝規格

Model 型號	Screw Standard of ANSI B1.1 ANSI B1.1 的螺絲 規格	Minimum Length of Screw 螺絲的最小長度	Screw-Head-to-Wall Minimum Distance 螺絲頭到牆壁最短距離	Wall-Mounting-Holes Distance 壁掛孔距離
MS105GS-M2	4#, (5#), 6#, 8#	7mm	1.5mm	52mm
MS108GS-M2	4#, (5#), 6#	7mm	1.5mm	110mm

For the EU countries, use only the power supply listed below:

Model	Power Adapter	Brand
MS105GS-M2	P090060-2C1	VASATA
MS108GS-M2	P120100-2C1	VASATA

ErP Info

MS105GS-M2:

- Power consumption in networked standby: 1.9 W
- Power consumption in networked standby when all wired network ports are connected and all wireless network ports are activated: 4.9 W
- The default period of time after which the power management function switches the equipment automatically into a condition providing networked standby: 20 minutes

MS108GS-M2:

- Power consumption in networked standby: 2.7 W
- Power consumption in networked standby when all wired network ports are connected and all wireless network ports are activated: 8.2 W
- The default period of time after which the power management function switches the equipment automatically into a condition providing networked standby: 20 minutes

Explanation of the symbols on the product label

產品標籤上符號的解釋

Note: The product label can be found at the bottom of the product and its I.T.E. power supply.
Symbols may vary from products.
注意：產品標籤可以在產品底部和其 I.T.E. 電源供應

Symbol 符號	Explanation 說明
	Class II equipment 二級設備
	Class II equipment with functional earthing 具有接地功能的二級設備
	Alternating current 交流電
	Direct current 直流電
	Polarity of d.c. power connector 輸出端點的極性
	For indoor use only 僅供室內使用
	Dangerous voltage 危險電壓
	Caution, risk of electric shock 請注意，有觸電的危險
	Energy efficiency Marking 能源效率標誌
	Protective earth 保護接地
	Earth 接地
	Frame or chassis 框架或外殼
	Functional earthing 功能接地
	Caution, hot surface 請注意，表面過熱
	Caution 警告
	Operator's manual 操作手冊
	Stand by 待機
	"ON"/"OFF" (push- push) “開啟” / “關閉” (按壓式)
	Fuse 保險絲
	Fuse is used in neutral N 保險絲用於中性線 N
	RECYCLING 回收
	This product bears the selective sorting symbol for Waste electrical and electronic equipment (WEEE). This means that this product must be handled pursuant to European directive 2012/19/EU in order to be recycled or dismantled to minimize its impact on the environment. 這個產品帶有歐盟指令 2012/19/EU 中關於廢棄電氣電子設備 (WEEE) 的選擇性分類標誌。這意味著，該產品必須按照該指令處理，以便進行回收或拆解，從而最大限度地減少對環境的影響。 User has the choice to give his product to a competent recycling organization or to the retailer when he buys a new electrical or electronic equipment. 用戶可以選擇將產品交給有資格的回收機構，或在購買新的電器或電子設備時將其交給零售商進行回收。
	Caution, avoid listening at high volume levels for long periods 請小心，避免長時間以高音量收聽。
	Disconnection, all power plugs 斷線，所有電源插頭
	Switch of mini-gap construction 迷你間隙結構開關
	Switch of micro-gap construction (for US version) Switch of micro-gap / micro disconnection construction (for other versions except US) 小間隙結構開關 (US 版本) 小間隙 / 小斷開結構的開關 (非 US 版)
	Switch without contact gap (Semiconductor switching device) 無接觸開關的開關 (半導體開關設備)