

300Mbps Wi-Fi Range Extender


Model: ME10

Highlights

- 300Mbps Stable Daily Wi-Fi Enjoy a fast and stable extended Wi-Fi up to 300 Mbps, meeting the needs of your daily use[†]
- Eliminate WiFi Dead Zones Boosts WiFi signal to previously unreachable or hard-to-wire areas flawlessly
- Easy One-Touch Setup Simply press the WPS button to expand your Wi-Fi coverage in seconds
- Built-In Access Point Mode Connect your wired internet connection to the extender via an Ethernet cable to turn it into a Wi-Fi access point














Extend WiFi to Where You Need It Most


The ME10 wall-mounted range extender easily expands your Wi-Fi router's coverage, letting you finally eliminate Wi-Fi dead zones from your home. Enjoy the high speed expansion WiFi wherever you need.

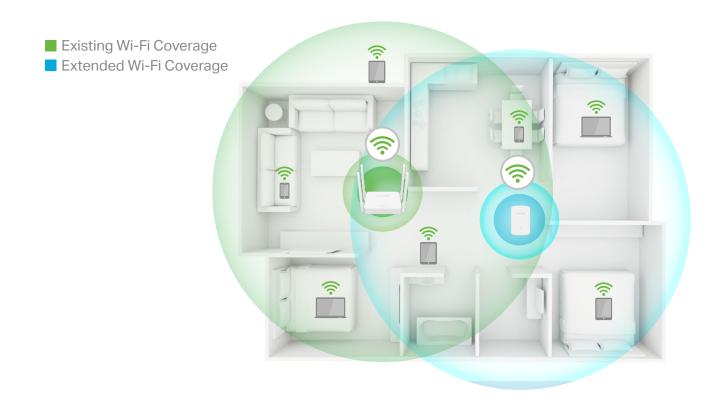



Connections

The ME10 boosts your existing Wi-Fi range and delivers fast wireless speed in hard-to-reach area, providing reliable connections for smartphones, tablets, laptops and other wireless-enabled devices.

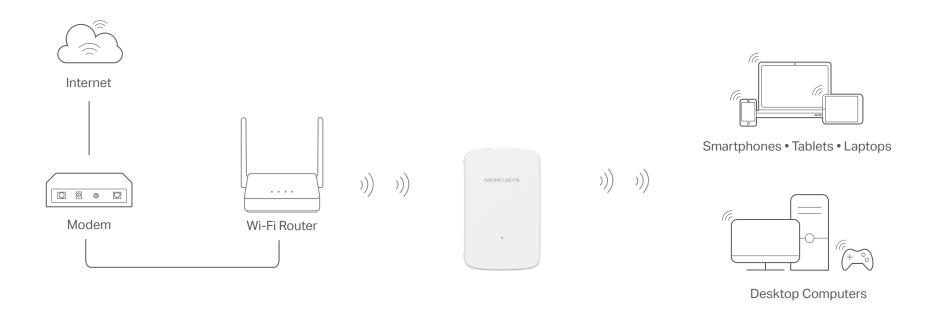



Specifications

Physical Specifications

Port

10/100Mbps RJ45 Port

Button

RESET/WPS Button

Power Consumption

≤ 3.2 W

Dimensions (L X W X H)

101 x 60 x 36 mm

Wireless Specifications

Wireless Standards

IEEE 802.11b/g/n 2.4GHz

Frequency

2.4 - 2.5 GHz

WiFi Speeds

Up to 300 Mbps

Transmission Power

≤ 20 dBm

Reception Sensitivity

2.4GHz:

11B 1M < -94 dBm

11N HT40 MCS7 < -72 dBm

Wireless Security

WPA-PSK/WPA2-PSK

Other Specifications

Certification

RoHS

Environment

• Operating Temperature: 0°C~40°C (32°F~104°F)

• Operating Humidity: 10%~90% Non-Condensing

Package Contents

• Wi-Fi Range Extender (ME10)

• Quick Installation Guide

© 2023 MERCUSYS

†Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput and wireless coverage are not guaranteed and will vary as a result of network conditions, client limitations, and environmental factors, including building materials, obstacles, volume and density of traffic, and client location.
†The product may not be compatible with routers or gateways with firmware that has been altered, is based on open source programs, or is non-standard or outdated.