

**MERCUSYS**<sup>®</sup>

**EasyMesh**  
Compatible

**Wi-Fi 6**

# AX2700 Dual-Band Wi-Fi 6 Router

Model: MR78X



Ultra-Fast Wi-Fi 6 Speeds  
up to 2.7 Gbps<sup>†</sup>

Connect 4× More Devices<sup>§</sup>

Beamforming with High-Gain  
Antennas for a Wider Coverage

Robust Dual-Core Processor  
to Minimize Buffering and Lag

Latest WPA3  
Wireless Encryption<sup>^</sup>

# Crank Up Your Wi-Fi to 6

The latest Wi-Fi 6 standard applies advanced technology designed to deliver more simultaneous connections, extend Wi-Fi range, and maintain reliably fast data transmissions, satisfying demands for high-performance wireless experiences.



### 2.7 Gbps Wi-Fi 6 Speeds

Featuring 160 MHz channels and 1024-QAM, MR78X offers dramatically fast wireless connections up to 2.7 Gbps. Experience smooth large-file downloads and uploads, stutter-free VR, and stunning 4K streaming without lag.<sup>1</sup>



### Connect 4x More Devices

With MU-MIMO and OFDMA, MR78X transmits data to and from multiple devices at the same time for 4x more capacity, greatly reducing lag and increasing transmission efficiency under the same conditions.<sup>2</sup>



### Minimize Buffering and Lag

Powered by a robust dual-core CPU, MR78X handles massive data throughput, allowing numerous bandwidth-intensive tasks to run smoothly at the same time.




### Eco-Friendly Power Saving

Target Wake Time reduces power consumption for your mobile and IoT devices during data transmissions to extend battery life.<sup>3</sup>

## EasyMesh-Compatible

MR78X is compatible with EasyMesh for a smooth whole home mesh Wi-Fi network, preventing drops and lag when switching signals. Enjoy uninterrupted streaming while roaming your house.\*

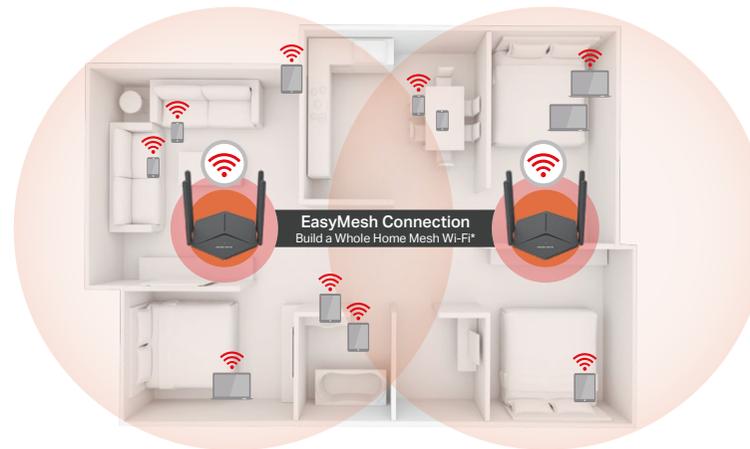

## Secure VPN Access

Easily set up VPN client or server modes directly on the router. Ideal for secure remote access, private browsing, and major protocols compatibility, including WireGuard, OpenVPN, L2TP/IPSec, and PPTP.



## Smart Connect

Smart Connect combines the 2.4 GHz and 5 GHz bands into a single Wi-Fi SSID and helps your devices intelligently choose the best available band that has the stronger signal and faster speed, keeping your devices always running optimally.



## // Specifications

### Hardware

#### Ports

1× Gigabit WAN Port + 3× Gigabit LAN Ports

#### Button


Reset Button, WPS Button

#### Dimensions

175.6 × 157.4 × 45.0 mm (6.9 × 6.2 × 1.7 inches)

#### Antennas

4× 5 dBi Fixed Omni-Directional Antennas

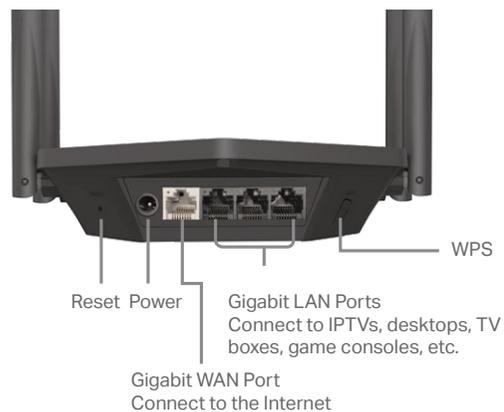

### Wireless

#### Wireless Speed

2402 Mbps (5 GHz) + 300 Mbps (2.4 GHz)<sup>†</sup>

#### Wireless Standards

802.11ax/ac/a/b/g/n

#### Wireless Features

OFDMA, MU-MIMO, 160 MHz Channel, 1024-QAM<sup>‡</sup>

#### Advanced Features

IPTV, IPv6, Access Point Mode, DHCP Server, and Smart Connect

#### Transmission Power

EU version: EIRP<sub>≤</sub>20dBm (2.4 GHz), EIRP<sub>≤</sub>23dBm (band1/band2), EIRP<sub>≤</sub>30dBm (band3)

US version: EIRP<sub>≤</sub>30dBm (2.4 GHz), EIRP<sub>≤</sub>24dBm (band2/band3), EIRP<sub>≤</sub>30dBm (band1/band4)

#### Reception Sensitivity:

2.4G:

11g 6Mbps : -96dBm

11g 54Mbps: -79dBm

11n HT20 MCS7: -78dBm

11n HT40 MCS7: -74.5dBm

5G:

11a 6Mbps: -94dBm

11a 54Mbps: -76dBm

11n HT20 MCS7: -74.5dBm

11n HT40 MCS7: -71.5dBm

11ac VHT20 MCS8: -70.5dBm

11ac VHT40 MCS9: -65.5dBm

11ac VHT80 MCS9: -63dBm

11ax HE20 MCS11: -64.5dBm

11ax HE40 MCS11: -62dBm

11ax HE80 MCS11: -59dBm

11ax HE160 MCS11: -56dBm

#### Wireless Function

Enable/Disable Wireless Radio, WMM

#### Security Features

- Wireless Security: WPA-PSK/WPA2-PSK/WPA3-SAE<sup>△</sup>
- Guest Network Access
- Firewall Protection
- VPN Support: OpenVPN/PPTP/L2TP/WireGuard VPN Server and Clients

## // Specifications

### Software

#### WAN Type

Dynamic IP/Static IP/PPPoE/L2TP/PPTP

#### DHCP

Address Reservation, Server, DHCP Client List

#### NAT Forwarding

Port Forwarding, Port Triggering, UPnP, DMZ

#### Management

Access Control

Local Management

Remote Management

#### Firewall Security

SPI Firewall, IP and MAC Address Binding

#### Guest Network

2.4 GHz Guest Network, 5 GHz Guest Network

#### Protocols

IPv4, IPv6

#### Cloud Service

Auto Firmware Upgrade, Mercusys ID, DDNS

#### DDNS

Mercusys, NO-IP, DynDNS

#### Quality of Service

QoS by Device

#### EasyMesh Supported

Parental Controls Supported

### Others

#### Package Contents

- AX2700 Wi-Fi 6 Router MR78X
- Power Adapter
- Quick Installation Guide
- RJ45 Ethernet Cable

#### Environment

- Operating Temperature: 0°C~40°C (32°F~104°F)
- Operating Humidity: 10%~90% Non-Condensing
- Storage Humidity: 5%~90% Non-Condensing



[www.mercusys.com](http://www.mercusys.com)

Specifications are subject to change without notice. MERCUSYS is a registered trademark of MERCUSYS TECHNOLOGIES CO., LTD. Other brands and product names are trademarks or registered trademarks of their respective holders. Copyright ©2026 MERCUSYS TECHNOLOGIES CO., LTD. All rights reserved.

†Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput, wireless coverage, and number of connected devices are not guaranteed and will vary as a result of network conditions, client limitations, and environmental factors, including building materials, obstacles, volume and density of traffic, and client location.

‡Use of 802.11ax (Wi-Fi 6), and features including OFDMA, MU-MIMO, 1024-QAM, BSS Color, and Target Wake Time requires clients to also support the corresponding features. Actual power reduction by Target Wake Time may vary as a result of network conditions, client limitations, and environmental factors. This router may not support all the mandatory features as ratified in Draft 3.0 of IEEE 802.11AX specifications. Further software upgrades for feature availability may be required.

§The 802.11ax white paper defines standardized modifications to both the IEEE 802.11 physical layers (PHY) and the IEEE 802.11 Medium Access Control (MAC) layer as enabling at least one mode of operation capable of supporting improvement of at least four times the average throughput per station (measured at the MAC data service access point) in a dense deployment scenario.

△Use of WPA3 requires clients to also support WPA3.

\*EasyMesh-compatible products can network with other devices that use EasyMesh. Failures may be due to firmware conflicts of different vendors. The EasyMesh-compatible function is still being developed on some models and will be supported in subsequent software updates. This product is compatible with standard EasyMesh technology but has not obtained the Wi-Fi EasyMesh™ certification.